


CONTROL DE ACCESOS INALÁMBRICO

Thanks for choosing our products, please read this guide carefully before you installing or operating it. We suggest you to employ professional workers to install, follow with this guide's instruction. Do not separate products, please keep well of the seal label for any warranty issues. Contact our distributors or customer service if you have any further questions.


Note

1. In default station, any password can unlock , please register admin password immediately after installation, do not close the door before everything check ok.
2. Unlock with 3 ways: Password, App, Card(optional).
3. Take care of the password, suggest to change it for a certain period for safe.
4. Keep device away from liquid.
5. Lock the door when leaving home.
6. WallReader can work with electromagnetic lock.

1. Structure

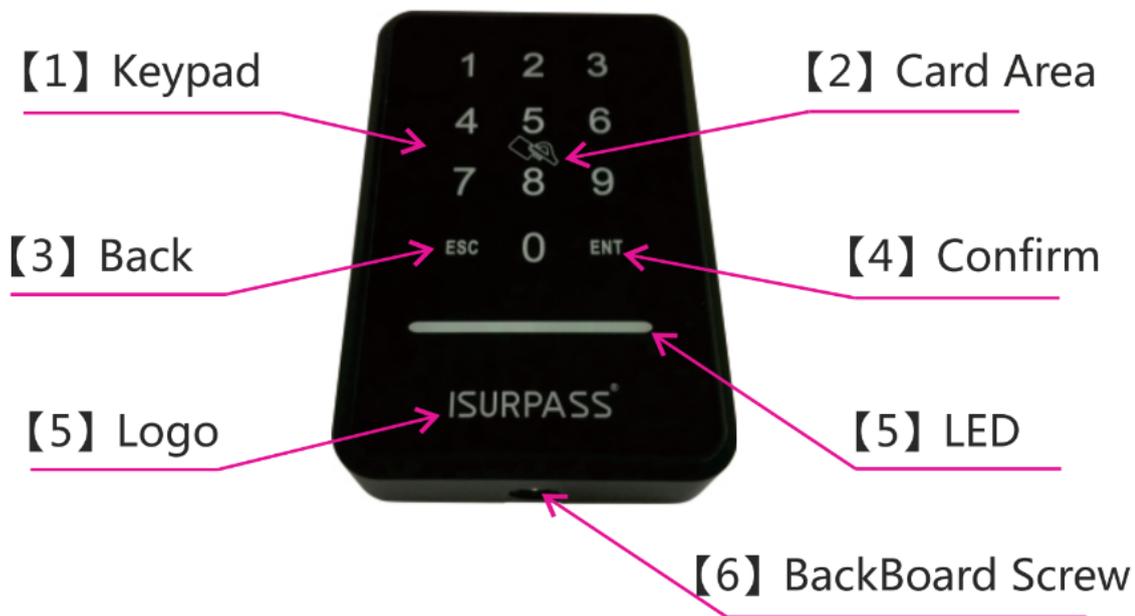


Front of Product

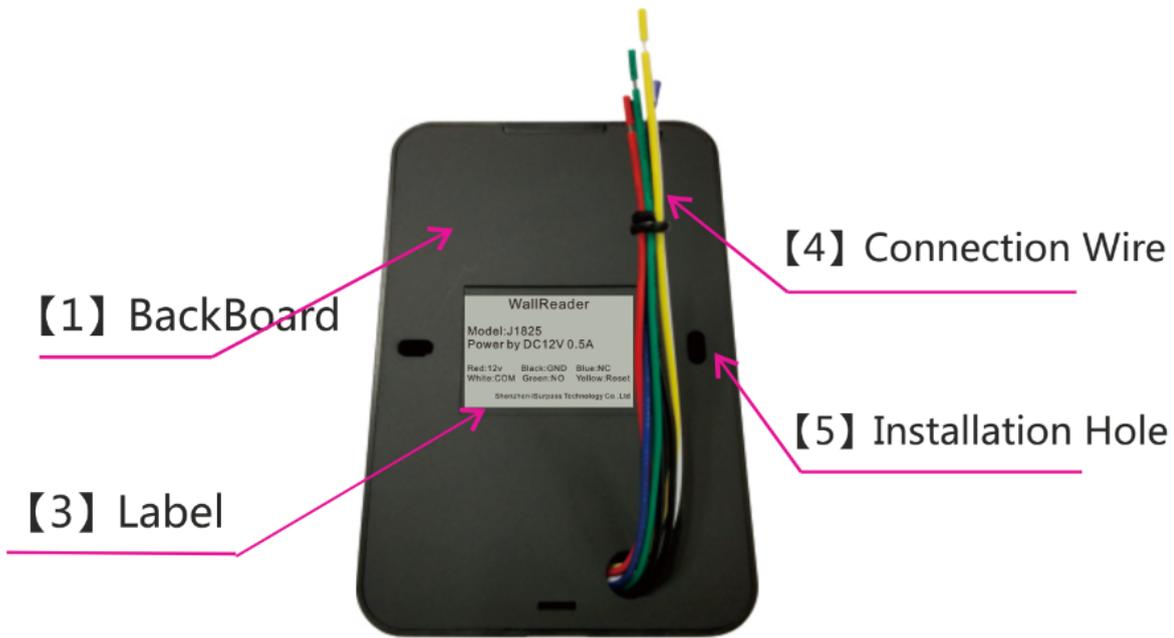

Back of Product

2. Installation Instruction

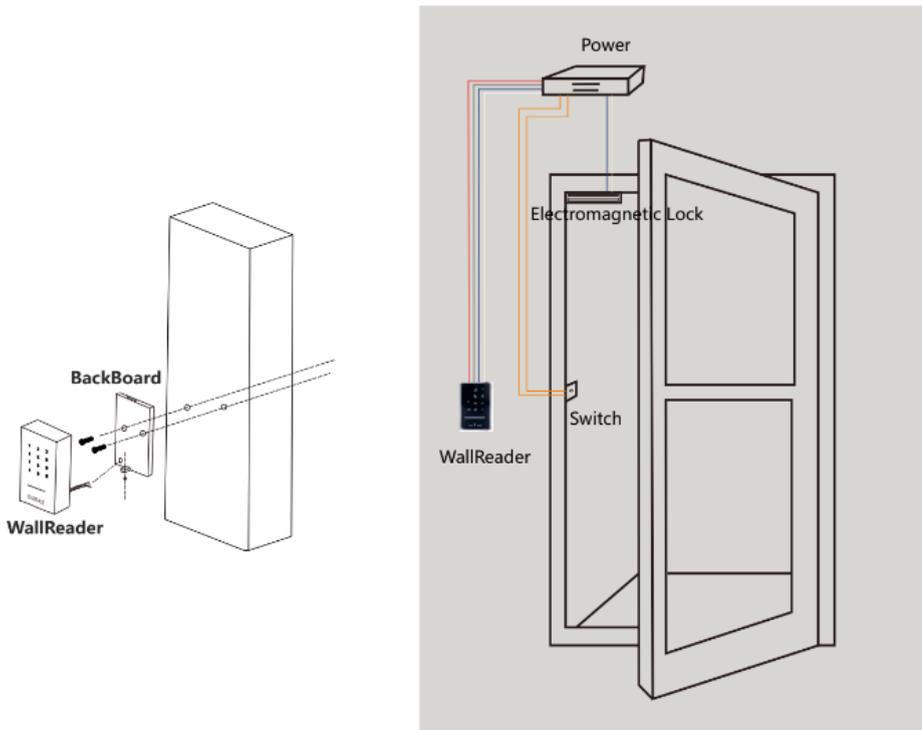

3. Factory Default Reset

User should reset device for safety when receiving it first or if forget the password or if lost card. The reset way: hold the reset button(keep YELLOW and BLACK wire together) about 7s, when hear “Di” sound, then release the button, device will be reset. Factory default reset will reset all user (password and card) , so be carefully to do reset.

4. Admin mode & Menu

Press Reset button(YELLOW and BLACK wire connect then separate quickly), when hear “Di” sound, then input admin password + ENT (default admin password is 123456).

5. About App

The device can work with mobile APP and other home automation devices through a Z-Wave gateway. With the gateway, users can track all the open log, check device status, make association, authorization, issue temporary password to visitors/cleaners,etc. The device is standard Z-Wave device, it is compatible with all Z-Wave gateway, please refer to each gateway manual for details.

6. About Z-Wave

WallReader is zwave product, it can be add into a gateway, then user can control it via app. Door lock compatible with third part manufacture, if you chose third part gateway, please refer to its guide, if you chose our gateway, please read carefully this guide, refer to app guide chapter 4 add door lock.

7. Specification

S/N	Item	Content
1	Coating Material	Zinc alloy
3	User Capacity (Admin)	9 groups
4	User Capacity (User)	221 groups

5	Power Supply	12VDC
6	Dynamic Current	≤80mA
7	Working Tem.	0~60°C
8	Working Humidity	20~95%
9	Dimension	L*W*H: 118.0×76.5×23.5mm
10	G.W	0.15kg

